

Adaptors




PVC Adaptor




Gasket



Steel Adaptor

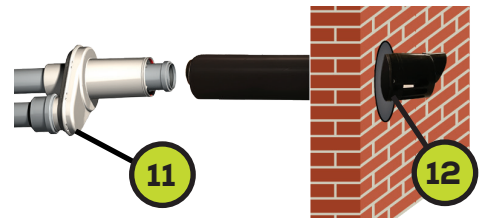

Accessories



Connector Ring

1 per fitting




Support Clamp

Horizontal
Every 39"

Vertical
Every 78"




Test Port




Bird Screen

Recommended

Termination Options




End Pipe



Snork/Snout



Horizontal Wall



Term




Term Tee



Chimney Cap

Concentric Adaptor → Termination Options



Adaptor




Wall Term.



Roof Term.

Based on Installation

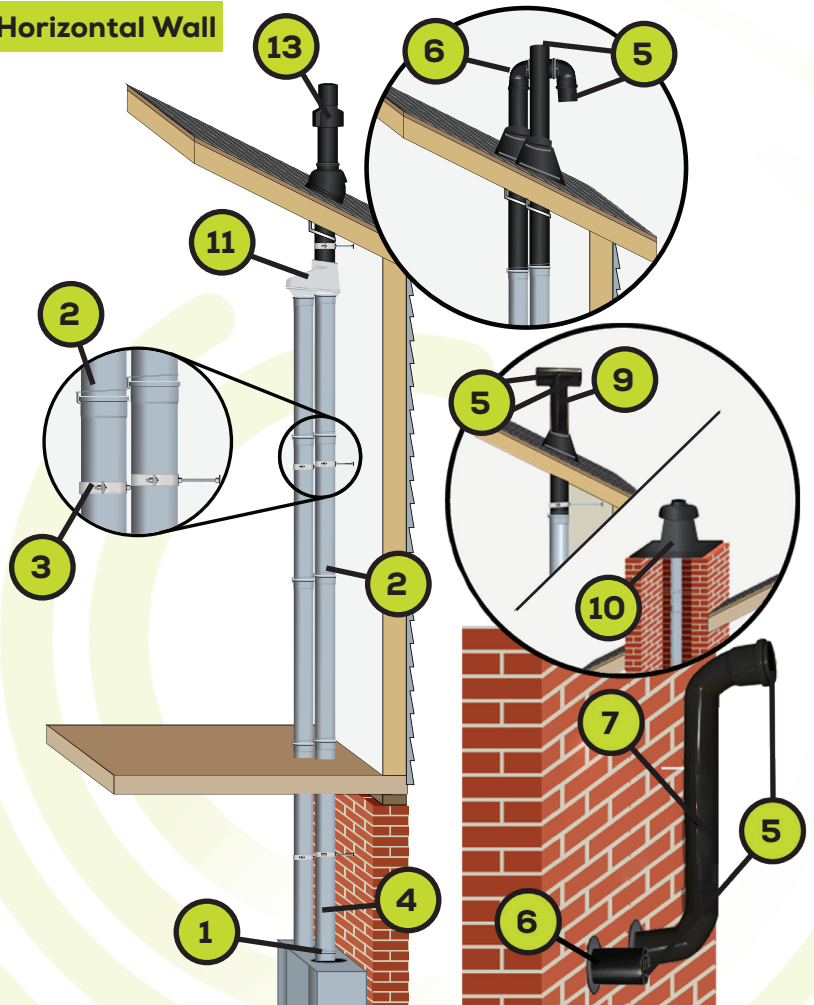

Vent Lengths

InnoFlue never requires glues, solvents or primers. Each component has a socket, and a male/female fitting connection. Apply Centrocerin lubricant and push together.

	2"	3"
1'	250400002190	250400102250
2'	250400002210	250400102270
3'	250400002230	250400102290
6'	250400002240	250400102300
10'	250400002200	250400102260



Lubricant



Centrocerin

250410003740

Condensate Management



Siphon



Drain Fitting



Tee



Tee Cap


Elbows

	2"	3"
45°	250405008040	250405108080
87°	250406008050	250406108100
87°	250406001350	250406101360
45° ^{UV}	250405008070	250405108090
87° ^{UV}	250406008060	250406108110


LONG SWEEP



Other Useful Components




EPDM Gasket



Wall Plate



Increaser



Reducer

Two Minute Product Overview



Take the Factory Tour!



InnoFlue Flex Product Overview



Full I&O Manual



Condensate Management Guide



OEM Matrix



NOTE: Both gray and black **InnoFlue** components can be used outdoors. All InnoFlue components have passed the UV stability test (ASTM G23-81) relevant to UL listing.

FIRST LISTED

InnoFlue® is the first polymeric vent system tested and listed to **ULC-S636** and **UL-1738** in North America.



Centrotherm